


FEELUX Dimmable LED Luminaire 100-277V~, 50/60Hz, CRI 90

Type VSSL10 xxK -UNV-C90 10W, 0.09A, Signal DC 1-10V
 VSSL15 xxK -UNV-C90 15W, 0.14A, Signal DC 1-10V
 VSSL20 xxK -UNV-C90 20W, 0.20A, Signal DC 1-10V (xx=LED Color Temperature)

Class of protection I
 Degree of protection IP 20
 Radio-interference-suppressed

SlimLamp Slid³ LED CRI90



This dimmable LED Luminaire is designed for universal usage in shop constructions, counters, shelves, display units, concealed lightings, and etc. Continuous row lightings are to be connected through flexible/direct connector and power supply cord

Mounting Dimensions




Fig.1 MAIN

SlimLamp Slid ³ LED CRI90	Wattage	Voltage Kvdc	Length L
VSSL10 xxK-UNV-C90 (xx=22,25,27,30,35,40,57)	10W	DC 24V	22 13/16" (580 mm)
VSSL15 xxK-UNV-C90 (xx=22,25,27,30,35,40,57)	15W	22 : 2200K	34 1/4" (870 mm)
		25 : 2500K	
		27 : 2700K	
VSSL20 xxK-UNV-C90 (xx=22,25,27,30,35,40,57)	20W	35 : 3500K	45 11/16" (1160 mm)
		40 : 4000K 57 : 5700K	

Mounting Arrangements



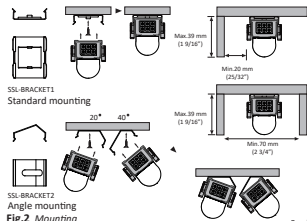


Fig.2 Mounting

Installation

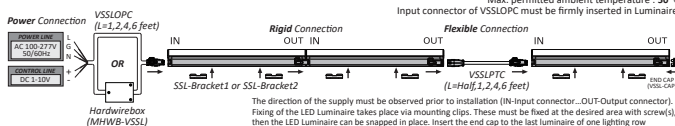

★ Installer instruction for Hardwirebox



CAUTION Risk of Fire, Max. 20pcs per channel and Max. 400W irrespective of channel.
 Max. permitted ambient temperature : 50 °C
 Input connector of VSSLOPC must be firmly inserted in Luminaire.

1. Select one of the 1/2" Knockouts that will be used for wiring the box and snap it out with a flat head screwdriver.
2. Remove the three screws from the top of the box and over the top off. Connect an appropriate bushing for the type of 1/2" trade conduit or wiring that will be used. Install the bushing in the knockout selected.
3. Mount the box with appropriate screws or fasteners to the mounting surface using the four counter sunk holes in the bottom.
4. Connect the conduit to bushing if conduit was used. Replace the box top and secure with the three screws.
5. Connect the first LED luminaire to the terminal block in the box with one of the interconnecting cords.

WARNING Information

This lighting is for indoor use only. Installation and removal must be performed after power supply disconnected. Installation shall be performed by a qualified electrician understanding the construction and operation of this lighting system and the electrical requirements involved. When connecting, insert connectors firmly. Pay close attention to the IN-Pin... OUT-Clip figures in lighting. Meaning of crossed out wheeled dustbin: Do not dispose electrical appliances as unsorted municipal waste, use designated collection facilities. Contact local government for information regarding available collection systems. If electrical appliances are disposed in landfills, hazardous substances/materials can leak into the groundwater, and obstruct food chain, damaging your health and well being. When replacing old appliances with new ones, the retailer is legally responsible for taking back old appliance for disposal with free of charge. Do not make modifications to or alter lighting housing, driver enclosure or electrical components other than those required for proper installation.

CAUTION Information

The unit conforms to the electromagnetic compatibility directive 2014/30/EU, and low voltage directive 2014/35/EU
! RISK OF FIRE (ATTENTION – RISQUE D'INCENDIE)
! SUITABLE FOR DAMP LOCATIONS (CONVIENT AUX EMPLACEMENTS HUMIDES)
! SUITABLE FOR UNDER-CABINET MOUNT (PEUT ÊTRE FIXÉ SOUS UNE ARMOIRE)
! SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET (APPROPRIÉ POUR L'INSTALLATION DANS LA ZONE DE STOCKAGE D'UN PLACARD)
! INDOOR USE ONLY
! LED light may be bright and intense enough to cause injury to human eyes. The customer should never look directly into the LED light.