


# FLS-M24V

Door and motion detection sensor



## Dimension (mm/inches)

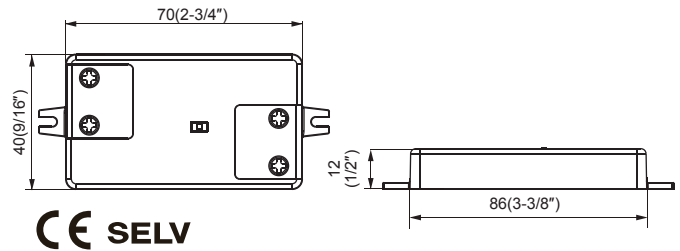

	Dimension in mm(inch)	Hole opening diameter(D)	Board thickness(L)
Sensor		$\varnothing 13\text{mm}$ $\varnothing 1/2''$	$> 1\text{mm}$ $(1/16'' )$

## Product Features

- IR sensor for LED lighting
- With 2 selectable functions before installation
- Detection range: less than 5cm(2") is recommended


## Characteristics

Model No.	Rated supply	Rated load
FLS-M24V	DC 24V	Max.60W

## Application

### Function1 (Monostable function)

1. If mounted behind a door, please select the monostable function
2. Open the door, the lamps turn on
3. Close the door, the lamps turn off



### Function 2 (Bistable function)

1. If mounted outside a door or a cabinet, please select the bistable function
2. Move hand over the detector, the lamps turn on
3. Move hand over the detector once again, the lamps turn off

