

# DecoLamp

T4 Linear Illumination



## DecoLamp

DecoLamp offers a miniature lighting system with maximum flexibility. Its compact size fits smallest spaces while providing excellent fluorescent lighting. The DecoLamp ideal for a display, cabinet and furniture.



## Product Features

- High efficiency built-in instant start ballast
- Extremely low profile extruded aluminum body
- Quick connection system
- Daisy chain up to 270W together
- Ballast and lamp shut down if fault present
- Very low heat output

## Benefits

- Ideal for use in heat-sensitive display
- Installation savings through quick connection system
- Long life with 12,000 hour T4 lamp



## Application

- Remarkably low profile (T4 size 13mm) fits almost everywhere
- Kitchen, Cabinet, Showcase, Furniture

## Notice

- Maximum interconnected wattage (units) : 270W
- 7W(31pcs), 10W(27pcs), 18W(15pcs)

## Installation

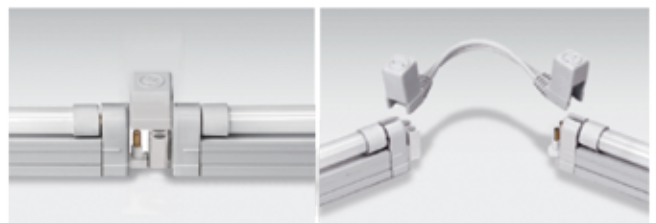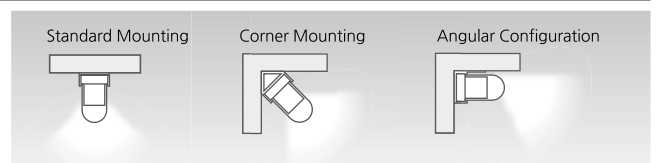



### Specification

- Frequency range : 60Hz
- Voltage : 110~130V
- Power factor : >97%
- Color rendering : Ra>80
- Tube life: 12,000hr
- Tube diameter: 13mm(T4)
- Class of protection I
- Degree of protection IP20
- Supply Voltage : 120V
- Line frequency : 60Hz
- Automatic safety shutdown of lamps in the event of a defect or at end of life (EOL)
- Automatic restart after lamp replacement
- Approval marks : cULus mark
- Safety acc. to UL 153 and C22.2 NO.12

### Accessories

#### Ⓐ Connecting cables

DLPTC/XL	DLPTC1/XL	DLPTC2/XL	DLPTC4/XL	DLPTC6/XL
6inch(150mm)	1feet(300mm)	2feet(600mm)	4feet(1200mm)	6feet(1800mm)

#### Ⓑ Direct connector : DLCPL/XL

##### Power cord

Ⓒ DLPC120/XL	Ⓒ DLPC120/SM2/XL
6feet (1800mm)	6feet (1800mm) with straight connctor

#### Ⓔ Fluorescent lamps

2200K, 2700K, 3000K, 3500K, 4000K, 6500K, 8000K,  
Red, Green and Blue are available.

#### Ⓕ On/Off switch : DLSB/XL

#### Ⓖ Metal Bracket : MSL BRACKET

#### Ⓗ Diffuser

DL7CV	DL10CV	DL18CV
7W	10W	18W

#### Ⓘ Hard wire box : MHWB-DL

MHWB-DL

Hard wire box with switch

Model Name	LampPower (W)	L (inch)	W (inch)	H (inch)	H (inch) with diffuser
NDL7-120V	7	10 6/16	23/32	1 5/16	1 13/32
NDL10-120V	10	13 6/16	23/32	1 5/16	1 13/32
NDL18-120V	18	20 6/16	23/32	1 5/16	1 13/32

