

SlimLamp Slide-V

Strong, Secure with Smart Locking System

Universal Dimming Line Voltage LED
for Cove Lighting



- Easy slide connection system
- Slim design with seamless lighting
- 0-10V dimming integrated ballast
- Round/Square Diffuser Available
- Slide-Up replacing system
- 100-277V Universal Voltage



Round diffuser
Standard



Square diffuser
Optional





Specification

Model Name	Voltage Input	Lamp Power	Lumens	Energy Efficiency	Color Rendering	Available Color	Operating temperature	Dimming
VSSL10 40K-UNV-C90	AC100~277V	9.2 W	730.3 lm	75 lm/W	Ra > 90	2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C	0-10V Dimming
VSSL15 40K-UNV-C90	AC100~277V	14.8 W	1,208.3 lm	82 lm/W	Ra > 90	2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C	0-10V Dimming
VSSL20 40K-UNV-C90	AC100~277V	20.3 W	1,697.4 lm	84 lm/W	Ra > 90	2,200K/2,500K/2,700K/3,000K/3,500K/4,000K/5,700K	0~45°C	0-10V Dimming


Dimension

Model Name	Voltage Input (V)	Lamp Power (W)	A (mm)	B (mm)	C (mm)
VSSL10 40K-UNV-C90	AC100~277	9.2	580	32.3	35.2
VSSL15 40K-UNV-C90	AC100~277	14.8	870	32.3	35.2
VSSL20 40K-UNV-C90	AC100~277	20.3	1,160	32.3	35.2


Notice

- Max.connection(Dimming) : 20pcs
- Max.connection(Non dimming) : 400W
- 10W(40pcs), 15W(26pcs), 20W(20pcs)


* Standard type (Round diffuser)




* Optional type (Square diffuser)



Wire Diagram

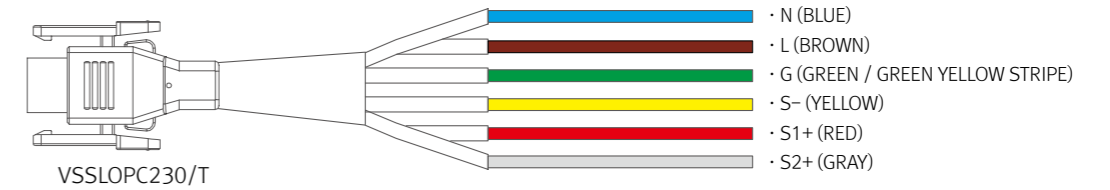

Connection

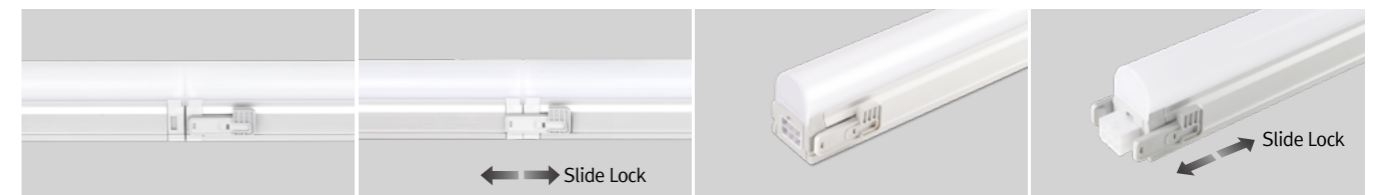

Accessories


① Open power cord

VSSLOPC230/T	VSSLOPC1/T	VSSLOPC2/T	VSSLOPC4/T
1800mm(6feet)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)



② Connecting cable

VSSLPTC/T	VSSLPTC1/T	VSSLPTC2/T	VSSLPTC4/T	VSSLPTC6/T
150mm(6inch)	300mm(1feet)	600mm(2feet)	1,200mm(4feet)	1,800mm(6feet)

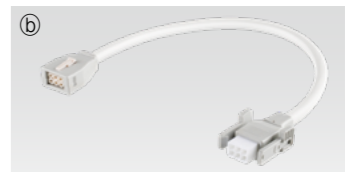

③ Mounting bracket

- SSL-BRACKET1(A) : 1set = 2pcs
- SSL-BRACKET1(B) : 1set = 3pcs



④ Angled bracket

- SSL-BRACKET2(A) : 1set = 2pcs
- SSL-BRACKET2(B) : 1set = 3pcs



⑤ Magnet bracket

- SSL-BRACKET-M(A) : 1set = 2pcs
- SSL-BRACKET-M(B) : 1set = 3pcs

