

FREE LUX

FLX Stix ODV

LED for Outdoor Installation

Light Creatures in the Night



FLX Stix ODV




Product Features


- Seamless Spot Free Illumination
- Exterior IP66 Rating
- Ultra Slim Profile
- Easy Installation
- 0-10V or Phase Dimming Available
- Quick Ship Available (pending factory availability)

Specification

- Voltage: DC 24V
- Operating Temperature: 0-45°C
- Lamp Life: 50,000hrs / 70%
- Available Color: 3000K, 4000K
(RGB available outside of North America)
- Color Rendering: Ra>85
- Energy Efficiency: 85lm/W
- Degree of Protection: IP66

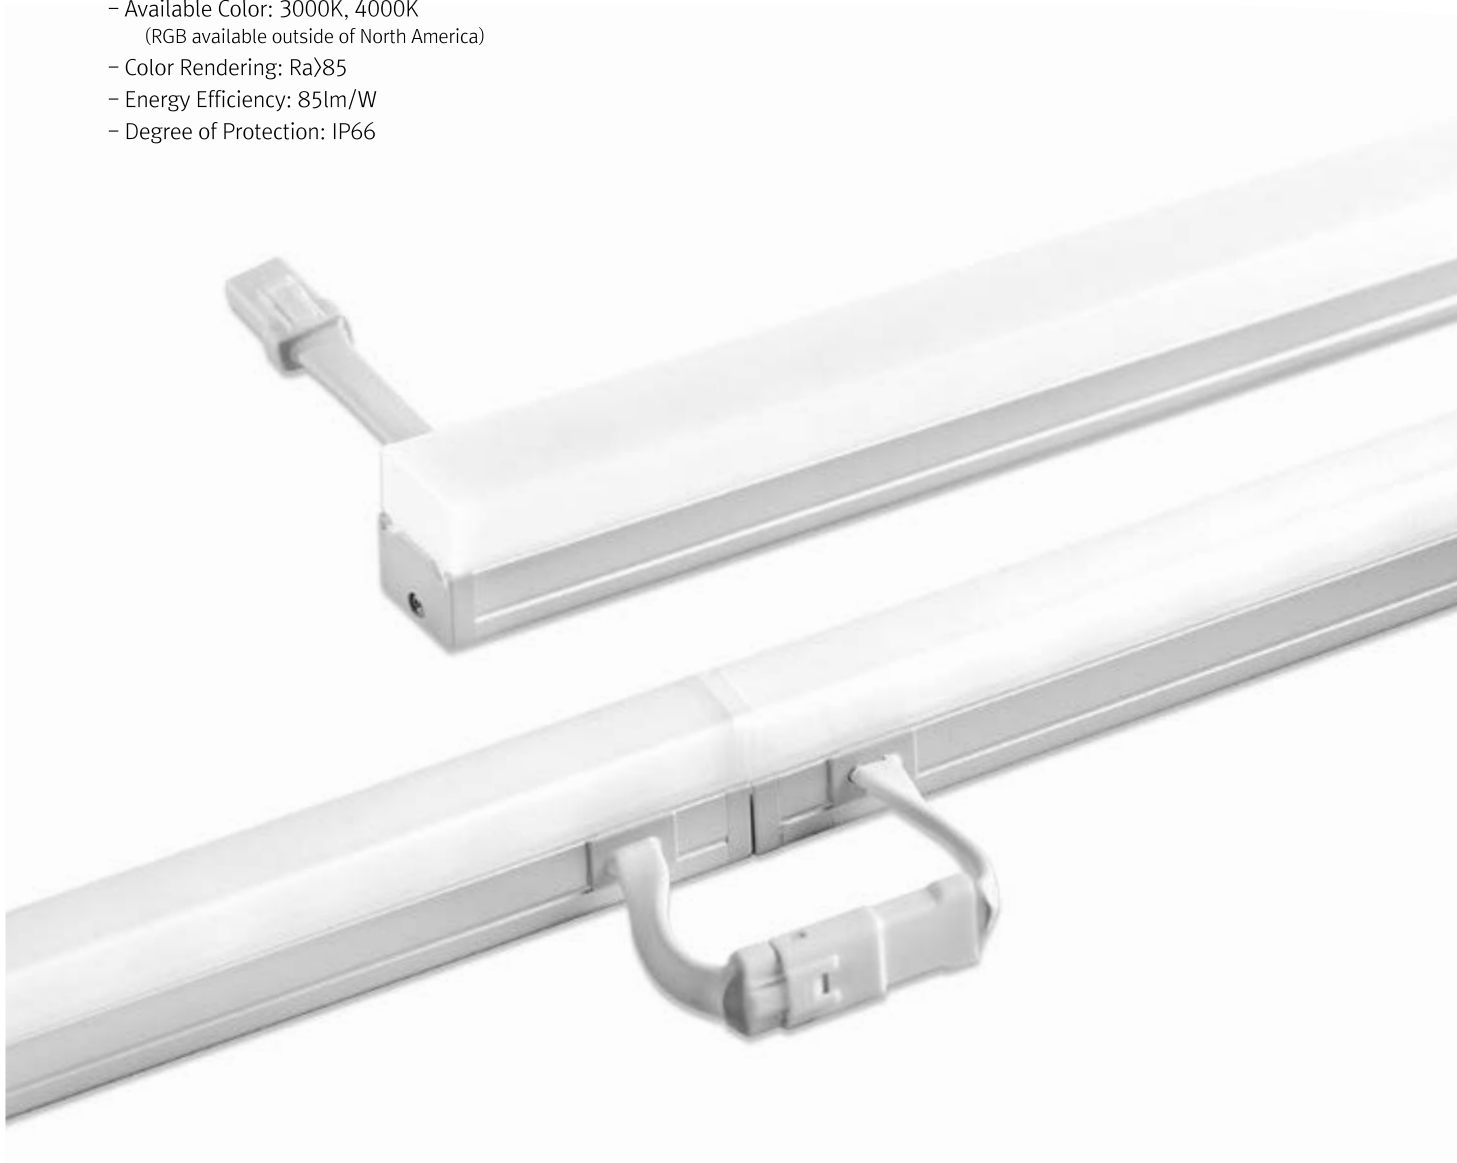


Easy connection

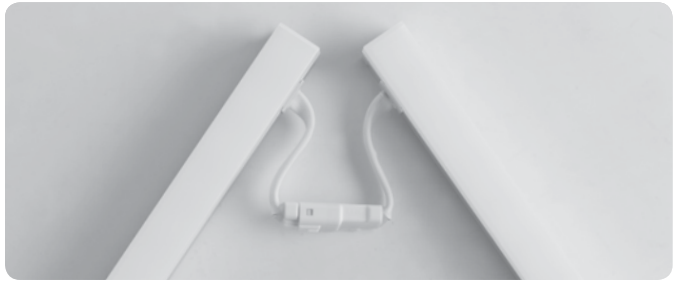

Dimension

* Fixture



Model Name	Power Input (V)	Lamp Power (W)	A inches (mm)	B inches (mm)	C inches (mm)
ODV3-(color)K-24V	DC24	2.9	5.5" (140.4)	.6" (15)	.87" (22.1)
ODV6-(color)K-24V	DC24	5.8	11" (280.5)	.6" (15)	.87" (22.1)
ODV12-(color)K-24V	DC24	11.6	22" (560)	.6" (15)	.87" (22.1)
ODV18-(color)K-24V	DC24	17.4	33" (839)	.6" (15)	.87" (22.1)

Accessories



(a) Fixture : FLX Stix ODV (only 30K and 40K fixtures available)

ODV3-(color)K-24V (3W)
 ODV6-(color)K-24V (6W)
 ODV12-(color)K-24V (12W)
 ODV18-(color)K-24V (18W)




(b) Connecting cable (Between FLX Stix ODV & FLX Stix ODV)

ODVPTC	ODVPTC1	ODVPTC2	ODVPTC4	ODVPTC6
6" (150mm)	1' (300mm)	2' (600mm)	4' (1200mm)	6' (1800mm)



(c) Power cable (Open power cable for FLX Stix ODV) : ODVPC



(d) Mounting bracket : ODV-BRACKET

Included in fixture



(e) LED Drivers

with 6 way distributor, with power cord (1800mm)
 FLC30-24V/XL
 FLC75-24V/XL



(f) Hard Wire Driver (90V to 300V)

XLAV80(L)-124V-SSB
 XLD200-224V-FCL-DIM
 XLD75-124V-FC



(g) Justin Drivers

481-24DCR	963-24DCR-277
483-24DCR-277	C2240-24DCR
961-24DCR	C2240-24DCR-277



(h) Dimming Interface (0-10V)

FDC-L10 (Max.100W)
 (where required)



(i) 6 Port Hub

D6P-HUB
 Included with Cord and Plug drivers.
 Order separately for Hard Wire or 3rd Party Drivers



(j) End cap : ODV-CAP

Included in fixture