

TEST REPORT

1. Applicant

* Client Name : KH-FEELUX Co. Ltd.
* Address : 235-48 Gwangjeok-ro Gwangjeok-myeon Yangju-si Gyeonggi-do 482-844 Korea
* Date of Receipt : 210805

2. Purpose of Report :**3. Number of Report :****4. Test Standard / Item :** / 210805 DVP-24V-C90-R 2684K**5. Test Period :** 210805 ~ 210805**6. Test Environment**

* Ambient Temp. : 27.6 +- 3 °C
* Relative Humidity : 65.5 +- 10 % RH

7. Test Item

* Name of Product :
* Rating :
* Model :

8. Test Result : Refer to the attachment

Confirmation	Test by		Technical manager	
	JSY	Sign	JSY	Sign

- * The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
- * This report cannot be reproduced, except in full.
- * This report is for reference only. It cannot replace the report by standard organization(s).

Result

Report Number	Sample Name	Sample Number	Test Standard

Test Item	Unit	Result	Notice
Beam Distribution Test		See Attachement	
ATHD	%	0.0	
CIE 1931 Cx, Cy		0.4645 , 0.4147	
Correlated Color Temperature	K	2684	
Ra		92.68	
Power Factor		1.000	
Input Voltage	V	24.000	
Input Current	A	0.108	
Input Watt	W	2.6	
Lamp Flux	lm	204.4	
Efficient	lm/W	78.86	
luminous Intensity (Max , Center)	cd	796 , 781	
Illuminance	lx	781	1 m
		195	2 m
		87	3 m

* This test result is for the sample provided by the client.

* Sample photo

Click to load image

Luminaire

Lamp

No. of lamps 1

Voltage (V) 24

Report

Filename 210805 DVP-24V-C90-R 2684K.jdt

Lamp flux (lm) 204

Current (A) 0.108

Operator


Total flux (lm) 204

Power Factor 1

Date

2021-08-05 오후 1:24:22

Luminous Intensity Distribution

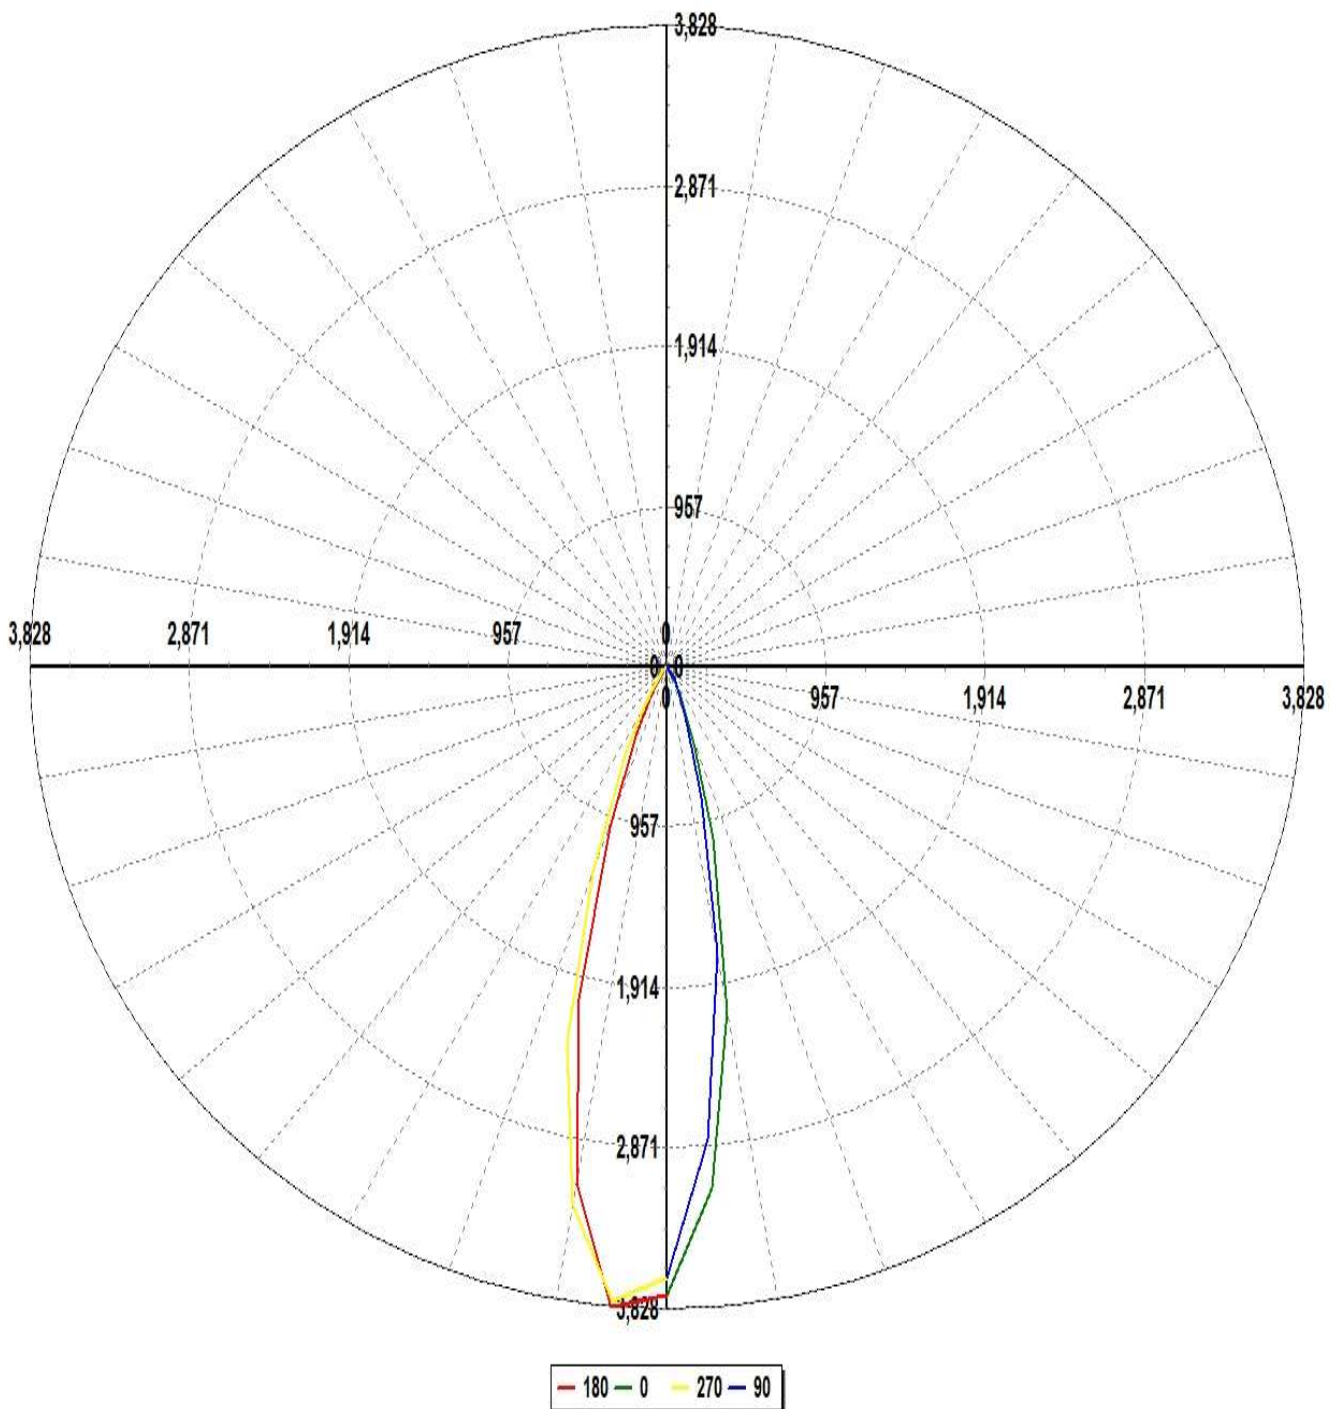

Luminaire

Lamp

No. of lamps 1

Voltage (V) 24

Report

Filename 210805 DVP-24V-C90-R 2684K.jdt

Lamp flux (lm) 204

Current (A) 0.108

Operator


Total flux (lm) 204

Power Factor 1

Date

2021-08-05 오후 1:24:22

Luminous Intensity Distribution (Lowest 10%)

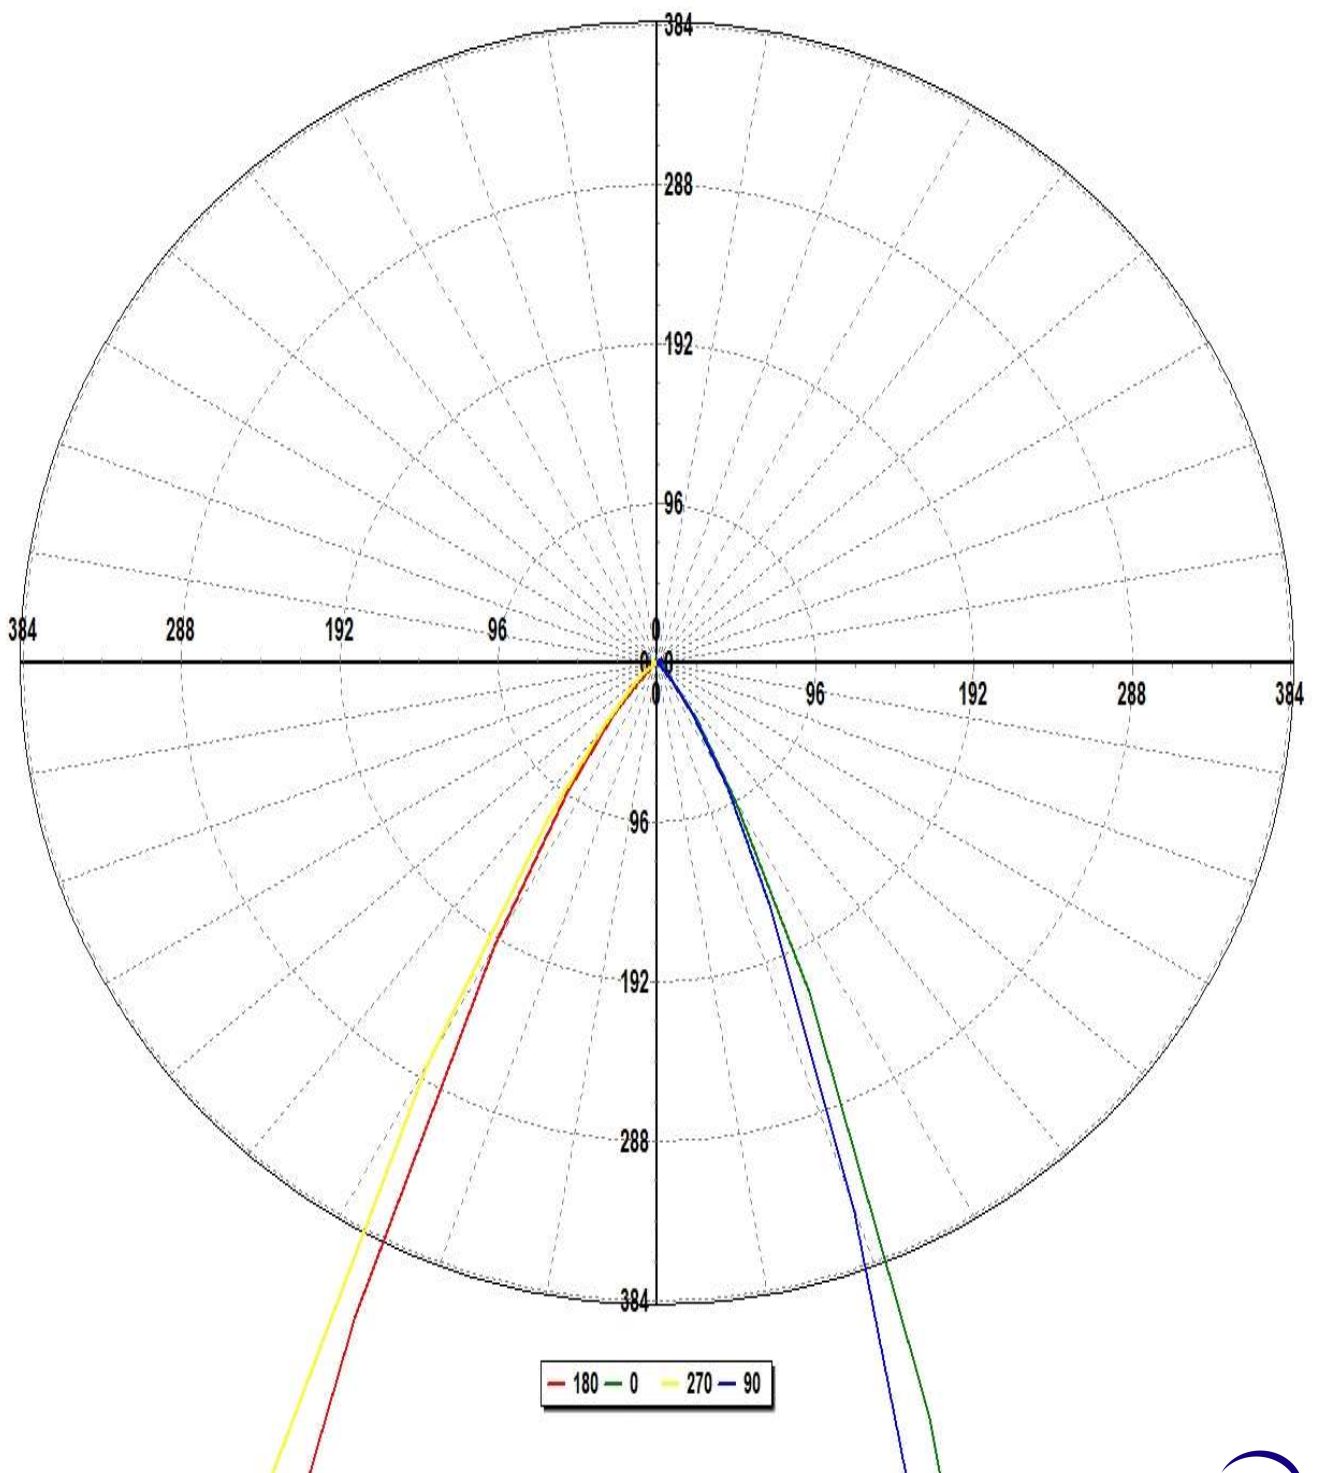

Total Optical Solution Provider

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24	Report	Filename 210805 DVP-24V-C90-R 2684K.jdt
Lamp flux (lm)	204	Current (A)	0.108	Operator	
Total flux (lm)	204	Power Factor	1	Date	2021-08-05 오후 1:24:22

Luminous Intensity Data

Maximum (cd) : 796

Minimum (cd) : -1

G/C	0	5	10	15	20	25	30	35	40	45	50
0	764.24	769.7	775.92	778.58	784.47	788.97	793.81	793.64	795.93	790.44	792.48
5	637.8	636.74	649.92	647.19	656.42	658.92	663.01	658.14	660.15	653.1	653.7
10	425.06	422.64	431.23	428.44	436.33	432.61	441.81	431.41	437.21	428.02	428.34
15	216.92	213.2	218.04	211.26	217.21	209.09	212.94	206.59	209.05	200.94	203.79
20	98.07	94.68	95.18	90.84	91.66	86.63	87.52	84.4	85.16	82.94	84.95
25	44.25	42.79	43.52	41.72	41.67	40.1	40.34	38.9	39.68	37.41	38.73
30	19.49	18.8	19.38	18.43	18.68	18.29	19.04	19.38	19.6	18.33	18.9
35	8.72	8.25	8.83	8.32	9.07	8.48	8.19	8.36	8.33	8.71	8.05
40	2.92	3.22	3.65	3.26	3.6	4.4	3.27	3.34	3.19	3.4	3.07
45	1.29	2.13	2.11	1.86	1.63	1.7	1.82	1.5	2.54	1.8	1.69
50	1.23	-0.45	0.35	1.07	0.67	0.59	0.45	-0.04	0.41	0.8	0.54
55	0.68	0.7	0.25	0.98	0.81	0.23	1.04	0.96	0.52	0.79	-0.26
60	0.89	-0.1	0.41	0.64	0.76	0.76	0.5	0.99	0.06	0.65	0.27
65	0.58	0.26	0.19	0.26	0.7	-0.04	-0.45	0.04	0	0.63	-0.58
70	-0.31	0.12	0.39	0.01	0.07	0.19	-0.4	0.59	-0.1	-0.19	0.64
75	0.62	0.63	-0.15	-0.65	0.24	0.02	-0.03	0	0.52	-0.29	0.41
80	-0.17	0.49	0.28	0.04	-0.41	0.06	-0.79	0.81	-0.16	0.72	-0.14
85	-0.2	-0.24	-0.16	0.16	-0.19	-0.36	-0.28	-0.09	0.52	0.57	0.31
90	0.59	-0.55	0.2	0.22	0.33	-0.54	0.43	0.5	0.35	0.27	-0.2
95	0.61	0.34	0.05	-0.51	0.21	-0.15	0.08	0.05	-0.01	0.31	-0.25
100	0.09	0.09	0.35	-0.23	0.21	0.34	0.23	-0.01	-0.58	0.09	-0.04
105	0.03	0.64	0.09	-0.32	-0.12	0.19	0.73	0.78	0.16	-0.48	-0.45
110	0.46	0.6	0.17	0.7	0.3	0.27	-0.11	0.53	0.32	0.32	0.13
115	-0.27	0.24	0.31	0.57	0.17	-0.33	0.54	0.49	-0.3	0.13	0.1
120	0.71	-0.25	-0.09	-0.13	-0.06	-0.22	-0.18	0.34	0.31	0.02	-0.01
125	0.14	0.54	0.01	0.68	0.31	0.78	0.55	0.41	0.14	0.51	0.59
130	0.84	-0.03	0.39	0.41	0.53	0.7	0.37	0.62	0.6	1.08	0.48

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24	Report	Filename 210805 DVP-24V-C90-R 2684K.jdt
Lamp flux (lm)	204	Current (A)	0.108	Operator	
Total flux (lm)	204	Power Factor	1	Date	2021-08-05 오후 1:24:22

Luminous Intensity Data (Continued)

Maximum (cd) : 796

Minimum (cd) : -1

G/C	55	60	65	70	75	80	85	90	95	100	105
0	787.13	783.92	775.27	768.26	762.11	756.8	747.33	743.12	729.86	727.7	715.54
5	644.35	639.14	626.6	617.86	606.19	602.04	584.86	577.52	559.25	554.92	535.28
10	414.15	415.32	398.27	395.61	378.19	373.03	355.91	353.2	333.45	327.86	313.37
15	194.16	196.22	190.69	189.92	179.06	178.08	166.05	164.7	154.02	151.78	141.54
20	82.43	84.18	80.07	81.64	77.88	76.73	72.15	71.07	66.2	64.06	60.83
25	36.59	37.83	36.39	36.29	35.43	35.7	33.99	33.24	31.29	29.45	27.61
30	19.51	19.72	20.16	19.72	19.04	19.08	17.85	17.33	15.81	15.4	13.82
35	8.49	9.28	9.3	10.55	10.26	10.36	8.2	7.63	7.17	7.09	6.78
40	2.6	3.12	2.79	2.85	3.08	3.37	2.04	3.02	1.96	2.12	1.78
45	1.4	1.46	1.33	1.19	1.34	2.39	1.12	0.75	0.74	0.6	0.43
50	0.93	0.59	1.24	0.61	0.66	0.42	0.75	0.94	0.55	1.03	1.05
55	0.11	0.41	0.75	0.57	0.25	0.27	0.88	0.43	0.59	0.81	0.37
60	0.14	-0.15	0.44	0.57	1.27	-0.03	0.58	-0.1	0.9	-0.26	0.38
65	0.2	0.49	0.09	-0.33	-0.21	-0.08	-0.02	0.15	0.21	0.29	0.47
70	-0.26	-0.14	-0.29	0.21	-0.12	0.15	0.05	0.05	0.16	0.1	-0.46
75	0.27	-0.49	-0.02	0.11	0.27	0.08	-0.33	0.53	0.08	0.51	-0.04
80	0.3	0.73	0.29	-0.32	0.55	0.18	-0.07	-0.29	-0.51	-0.14	-0.18
85	0.28	0.01	-0.05	-0.24	0.15	0.43	0.01	-0.02	0.51	0.01	0.41
90	-0.49	0.16	-0.18	-0.02	-0.45	-0.12	-0.23	-0.1	0.28	0.13	0.18
95	-0.51	-0.35	0.1	0.05	0.26	-0.35	-0.13	-0.19	0.3	-0.79	-0.17
100	-0.05	-0.27	0.21	-0.54	-0.81	0.34	0.06	0.4	0.44	0.41	0.26
105	0.92	-0.09	-0.08	0.72	0.11	0.68	-0.46	0.16	0.02	-0.02	0
110	0.45	-0.19	-0.17	-0.12	-0.52	0.21	0.43	-0.17	-0.74	-0.31	0.58
115	0.05	-0.11	-0.44	0.33	0.49	0.55	0.12	0.09	-0.27	0.25	0.05
120	0.29	0.13	0.13	0.23	0.1	0.66	-0.12	0.2	0.34	1.39	0.93
125	0.29	1.38	-0.24	0.16	0.37	0.56	0.08	0.76	0.2	-0.17	0.87
130	-0.08	1.03	0.92	0.3	0.17	0.94	0.69	0.62	0.26	1.1	0.92

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24	Report	Filename 210805 DVP-24V-C90-R 2684K.jdt
Lamp flux (lm)	204	Current (A)	0.108	Operator	
Total flux (lm)	204	Power Factor	1	Date	2021-08-05 오후 1:24:22

Luminous Intensity Data (Continued)

Maximum (cd) : 796

Minimum (cd) : -1

G/C	110	115	120	125	130	135	140	145	150	155	160
0	713.08	704.83	702.49	691.66	688.26	677.41	677.91	661	667.38	657.39	655.01
5	532.25	515.5	509.14	494.51	488.72	471.33	467.58	455.05	452.56	438.53	439.28
10	302.73	287.43	284.56	269.98	267.11	253.72	250.49	238.04	238.74	227.12	226.54
15	137.66	127.86	128.2	120.03	119.82	113.07	113.57	107.1	107.49	101.26	101.33
20	59.26	56.18	55.34	53.54	53.07	51.06	50.95	48.09	48.69	46.41	46.28
25	27.05	25.86	25.57	24.31	25.04	23.84	24.21	24.52	24.76	23.47	23.7
30	13.48	12.54	11.93	11.52	11.81	11.81	11.45	11.39	11.72	12.15	12.05
35	5.66	6.39	5.2	5.14	5.17	5.68	4.8	4.12	4.14	5.23	4.86
40	1.92	1.94	2.11	1.39	1.73	2.38	1.68	1.81	1.28	1.29	1.45
45	1.2	0.12	0.6	0.72	0.58	0.76	0.81	-0.03	0.03	0.4	0.65
50	0.27	0.84	0.71	0.3	0.54	1.05	1.31	0.8	0.75	1.08	0.66
55	0.85	0.45	0.23	0.99	0.64	0.47	0.64	0.77	0.88	0.34	0.25
60	-0.67	-0.15	0.41	1.09	0.27	-0.05	-0.48	-0.18	0.17	0.33	0.28
65	-0.04	0.17	0.35	0.17	-0.24	0.49	0.36	0.51	-0.03	-0.09	0.35
70	0.09	0.2	0.27	0.19	-0.2	0.5	-0.56	0.26	0.43	-0.43	-0.33
75	0.36	0.32	-0.16	-0.12	-0.32	-0.13	0.25	-0.06	-0.12	-0.5	0.42
80	0.05	-0.08	0	-0.17	-0.15	-0.16	0.33	-0.38	-0.09	0.19	0.3
85	-0.39	-0.11	0.24	0.19	0.13	-0.03	-0.14	0.06	0.51	-0.08	0.3
90	0.52	0.51	0.8	0.12	0.54	-0.22	-0.03	0.11	0.07	0.3	-0.68
95	-0.03	0.01	0.25	0.27	-0.41	-0.7	-0.06	-0.46	0.73	0.28	-0.03
100	0.05	-0.56	0.15	0.2	0.37	-0.49	0.1	-0.17	-0.32	0.02	0.76
105	-0.34	-0.13	-0.12	0.14	-0.22	-0.11	0.17	0.99	0.02	-0.02	0.34
110	-0.16	0.47	-0.08	-0.02	0.03	0.26	0.01	0.87	-0.26	0.1	-0.69
115	0.66	0.06	-0.99	0.05	-0.36	-0.58	0.22	-0.27	-0.16	0.46	-0.29
120	-0.42	0.65	-0.06	0.44	0.19	-0.22	0.25	0.52	1.15	0.17	0.18
125	0.13	0.59	0.19	0.17	0.57	0.29	0.09	1.21	0.32	-0.57	0.36
130	0.79	0.04	0.93	0.93	0.76	0.76	0.56	0.45	1.28	0.26	1.08

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24	Report	Filename 210805 DVP-24V-C90-R 2684K.jdt
Lamp flux (lm)	204	Current (A)	0.108	Operator	
Total flux (lm)	204	Power Factor	1	Date	2021-08-05 오후 1:24:22

Luminous Intensity Data (Continued)

Maximum (cd) : 796

Minimum (cd) : -1

G/C	165	170	175	180	185	190	195	200	205	210	215
0	648.83	647.79	640.46	764.24	769.7	775.92	778.58	784.47	788.97	793.81	793.64
5	428.2	429.4	419.34	781.34	780.65	775.81	780.97	775.8	775	772.62	777.26
10	217.21	215.38	207.01	639.25	639.91	635.53	635.91	628.55	631.82	627.45	635.16
15	96.14	96.32	90.97	419.25	422.96	414.24	417.04	412.23	417	409.97	416.24
20	43.53	43.59	41.74	206	207.47	199.2	203.15	197.14	202.2	199.24	204.32
25	22.16	21.69	19.78	88.33	87.52	83.29	84.8	81.9	84.04	82.61	86.31
30	11.54	10.77	9.85	40.03	39.84	38.64	38.4	38.28	38.96	38.94	40.93
35	3.92	3.05	2.61	19.31	19.88	19.01	18.32	17.88	18.5	18.3	18.61
40	1.1	1.57	1.8	8.42	8.96	8.14	7.9	7.82	7.63	7.99	7.87
45	1	0.86	-0.02	2.82	3.53	2.65	3.13	2.76	3.09	3.06	3.22
50	0.75	0.82	0.71	1.04	1.17	1.22	1.25	1.77	1.18	1.46	1.67
55	0.44	0.46	-0.03	0.92	1.04	0.62	0.66	1.22	0.55	0.26	0.4
60	0.12	0.01	0.59	0.88	-0.11	0.49	0.77	0.72	-0.06	0.38	0.32
65	0.26	-0.45	0.42	1.15	1.2	-0.1	0.03	0.6	0.48	0.62	0.11
70	-0.44	0.23	0.87	0.12	0.38	0.13	-0.29	-0.15	0.44	0.43	-0.03
75	-0.45	-0.34	0.29	0.41	0.03	0.23	-0.01	0.09	0.04	-0.3	-0.2
80	-0.11	0.73	-0.07	0.13	0.5	-0.09	0.52	-0.06	-0.37	0.15	0.06
85	-0.31	-0.28	0.08	0.28	-0.44	0.26	-0.33	-0.31	-0.07	-0.65	-0.69
90	-0.49	-0.39	0.55	-0.49	-0.74	0.43	0.21	0.09	-0.31	0.37	0.35
95	-0.01	0.07	0.3	0.08	0.45	-0.06	0.1	0.29	0.35	-0.09	0.44
100	-0.5	0.41	-0.58	-0.13	-0.37	0.03	0.18	0.14	0.08	-0.62	-0.51
105	-0.25	-0.08	-0.15	-0.63	0.08	0.61	0.13	0.37	0.09	-0.16	-0.14
110	-0.05	0.25	0.05	0.61	-0.75	0.37	-0.28	-0.11	0.21	-0.09	0.01
115	-0.02	-0.39	0.27	-0.25	0.13	0.54	0.35	0.02	-0.22	-0.01	0.77
120	0.55	0.53	0.22	-0.6	0.76	0.53	0.74	0.8	-0.39	0.15	0.21
125	0.54	0.41	0.69	-0.04	0.44	0.48	0.89	0.3	0.3	0.83	-0.24
130	1.18	0.89	1.1	0.31	0.68	0.85	0.36	-0.29	0.17	0.88	0.59

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24	Report	Filename 210805 DVP-24V-C90-R 2684K.jdt
Lamp flux (lm)	204	Current (A)	0.108	Operator	
Total flux (lm)	204	Power Factor	1	Date	2021-08-05 오후 1:24:22

Luminous Intensity Data (Continued)

Maximum (cd) : 796

Minimum (cd) : -1

G/C	220	225	230	235	240	245	250	255	260	265	270
0	795.93	790.44	792.48	787.13	783.92	775.27	768.26	762.11	756.8	747.33	743.12
5	776.83	777.98	774.64	777.55	775.11	772.15	770.77	778.16	776.82	778.88	775.89
10	629.59	633.93	631.87	637.38	641.13	643.77	645.95	656.26	654.08	664.04	664.13
15	406.78	418.12	414.26	424.71	424.74	435.38	441.43	454.84	455.42	469.01	473.92
20	202.94	209.51	208.77	218.4	219.64	230.61	235.01	248.61	253.49	263.57	266.96
25	85.62	90.88	91.16	97.46	99.82	107.88	108.82	116.22	118.95	124.08	124.03
30	41.12	42.52	42.88	46.17	46.55	50.51	51.24	54.26	54.13	57.15	57.14
35	18.41	19.13	18.2	20.53	20.7	21.66	21.97	24	24.08	24.83	23.74
40	7.95	8.11	8.46	8.8	8.33	8.88	10.21	10.55	10.24	10.42	10.03
45	3.23	3.26	3.45	3.49	3.55	4.06	3.98	4.23	4.11	4.01	4.55
50	1.56	1.91	1.65	1.49	1.83	1.31	1.85	1.47	1.81	1.91	2
55	0.74	0.68	1.06	0.29	0.34	0.66	0.44	0.55	0.66	0.38	0.51
60	0.19	0.26	0.69	0.79	0.36	0.63	0.46	0.67	0.53	0.36	0.19
65	0.51	0.98	1.09	0.37	-0.35	0.7	-0.17	0.01	0.66	0.38	0.64
70	0.42	0.8	0.86	-0.19	0.3	0.45	0.22	-0.08	-0.44	0.23	-0.22
75	-0.29	0.09	0.2	0.88	0.73	-0.27	0.53	-0.71	0.23	0.27	-0.03
80	-0.2	-0.26	0.05	0.55	-0.05	-0.11	0.48	0.36	0.25	-0.02	0.12
85	0	0.33	0.26	-0.19	-0.03	0.47	-0.05	-0.06	-0.06	0.52	-0.12
90	0.16	-0.12	-0.45	0.61	0.31	0.31	0.02	-0.13	0.06	0.55	0.46
95	0.2	-0.8	-0.38	-0.25	-0.11	0.12	0.5	-0.32	0.74	0.04	0.12
100	0.2	-0.15	-0.2	0.28	-0.2	0.2	0.67	0.28	0.21	0.11	0.62
105	0.25	0.33	0.22	-0.35	-0.01	0.33	-0.58	-0.7	0.34	0.32	-0.14
110	0.29	0.06	-0.04	0.64	0.27	0.15	0.07	0.08	-0.11	-0.39	-0.31
115	0.13	0.33	0.45	0.34	-0.15	-0.25	-0.41	-0.11	0.04	-0.2	0.12
120	-0.14	0	-0.22	-0.47	0.34	0.32	0.36	0.06	-0.13	0.28	-0.14
125	-0.16	0.56	0.28	0.24	-0.14	0.04	0.89	0.36	0.01	0.18	-0.12
130	0.8	0.97	0.93	0.51	-0.03	0.53	0.18	0.8	0.43	0.76	-0.06

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24	Report	Filename 210805 DVP-24V-C90-R 2684K.jdt
Lamp flux (lm)	204	Current (A)	0.108	Operator	
Total flux (lm)	204	Power Factor	1	Date	2021-08-05 오후 1:24:22

Luminous Intensity Data (Continued)

Maximum (cd) : 796

Minimum (cd) : -1

G/C	275	280	285	290	295	300	305	310	315	320	325
0	729.86	727.7	715.54	713.08	704.83	702.49	691.66	688.26	677.41	677.91	661
5	780.05	782.06	782.49	774.64	781.79	777.45	782.87	779.7	780.33	784.54	781.23
10	676.65	676.87	687.86	693.16	700.08	704.16	713.76	715.97	722.34	726.29	731.94
15	491.71	492.56	510.92	512.75	530.18	537.27	551.66	558.54	575	577.43	591.28
20	278.39	283.79	295.6	298.31	313.35	318.9	333.26	338.03	355.15	360.17	376.72
25	130.7	129.41	136.21	136.77	146.6	147.03	157.04	158.74	169.7	172.18	185.79
30	58.66	59.78	61.85	62.47	66.46	66.32	70.09	70.76	75.66	76.23	80.53
35	25.03	25.27	26.13	26.14	27.86	27.73	30	30.43	33.09	34.06	36.16
40	10.38	10.82	11.39	10.82	12.59	11.75	12.98	12.92	14.74	15.48	15.73
45	4.36	4.79	5.22	4.69	5.24	4.99	4.97	5.86	5.89	6.17	6.08
50	2	1.16	1.41	1.63	1.81	2.11	2.27	1.99	2.52	3.13	2.44
55	1.45	0.47	0.89	1.02	0.93	1.23	1.55	0.95	1.38	1.35	0.67
60	0.47	0.36	0.34	-0.08	0.22	1.47	1.28	0.24	0.59	1.08	0.54
65	0.04	1.09	0.62	-0.25	-0.44	0.75	-0.14	0.55	0.09	0.97	0.41
70	0.27	0.4	0.48	0.26	0.39	0.21	0.71	0.7	0.11	0.33	0.76
75	0.07	0.35	-0.29	-0.14	-0.7	0.32	-0.02	0.04	-0.25	0.07	0.12
80	-0.21	-0.11	-0.64	-0.42	-0.53	-0.53	-0.53	0.56	-0.05	0.03	0.43
85	-0.08	0.54	-0.05	-0.16	-0.01	-0.22	-0.32	-0.14	-0.41	0.32	0.19
90	0.33	0.33	-0.16	0.45	-0.25	-0.54	0.61	-0.85	-0.13	0.09	0.48
95	0.07	-0.23	0.84	-0.41	0.58	0.14	-0.36	-0.87	-0.24	0.35	-0.03
100	0.1	0.35	-0.29	0.13	-0.66	0.46	0.52	-0.25	0.13	0.7	-0.72
105	0.01	0.14	1.16	0.55	0.27	0.45	-0.5	-0.15	0.32	-0.46	-0.03
110	0.23	0.06	-0.7	0.24	-0.87	-0.33	0.39	0.23	-0.48	-0.17	-0.05
115	-0.3	-0.16	-0.35	0.59	0.58	-0.23	0.04	0.3	0.39	0.16	-0.01
120	0.12	0.73	0.13	0.09	-0.1	-0.44	-0.1	-0.02	-0.38	-0.38	0.35
125	0.17	0.78	0.52	0.49	0.16	0.48	0.87	0.26	-0.13	0.43	0.01
130	0.15	0.56	0.48	0.08	0.09	-0.07	0.08	0.04	0.65	0.49	0.21

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24	Report
Lamp flux (lm)	204	Current (A)	0.108	Filename 210805 DVP-24V-C90-R 2684K.jdt
Total flux (lm)	204	Power Factor	1	Operator
				Date 2021-08-05 오후 1:24:22

Luminous Intensity Data (Continued)

Maximum (cd) : 796

Minimum (cd) : -1

G/C	330	335	340	345	350	355	360
0	667.38	657.39	655.01	648.83	647.79	640.46	764.24
5	779.91	776.31	779.57	780.44	781.02	778.51	637.8
10	736.19	742.78	745.81	752.81	754.13	760.7	425.06
15	595.77	611.01	610.14	622.02	622.03	632.11	216.92
20	380.17	395.77	396.74	409.83	409.57	419.64	98.07
25	188.12	200.46	201.91	212.03	210.6	218.32	44.25
30	82.08	87.98	90.04	95.4	94.57	97.78	19.49
35	36.77	39.04	40.33	43.23	43.97	45.25	8.72
40	16.33	17.66	18.07	18.91	19.3	19.98	2.92
45	6.56	7.63	7.82	8.64	8.96	8.93	1.29
50	2.73	3.05	2.85	3.67	3.32	2.26	1.23
55	1.03	0.99	0.87	1.52	1.96	2.18	0.68
60	1.13	0.38	1.06	0.32	1.12	1.18	0.89
65	0.3	0.15	0.95	1.04	0.41	0.57	0.58
70	0.54	-0.01	1.03	0.18	0.68	0.51	-0.31
75	0.2	0.19	-0.37	0.46	-0.08	0.6	0.62
80	0.56	-0.6	-0.07	-0.28	-0.1	-0.05	-0.17
85	0.1	0.35	0.03	0.44	-0.12	0.19	-0.2
90	0.48	-0.37	0.03	0.09	0.35	0.17	0.59
95	-0.48	-0.09	-0.35	-0.55	-0.08	-0.42	0.61
100	0.86	0.36	-0.02	0.06	-0.23	-0.08	0.09
105	0.27	0.06	-0.11	-0.12	-0.3	0.11	0.03
110	0.3	0.23	0.51	0.3	-0.32	0.21	0.46
115	0.23	-0.13	0.46	-0.2	-0.12	0.45	-0.27
120	-0.18	0.56	0.16	0.2	0.31	0.04	0.71
125	0.22	-0.33	0.77	0.48	0.27	0.15	0.14
130	0.56	0.1	0.16	-0.06	0.22	-0.19	0.84

Luminaire

Lamp

No. of lamps	1	Voltage (V)	24	Report	
Lamp flux (lm)	204	Current (A)	0.108	Filename	210805 DVP-24V-C90-R 2684K.jdt
Total flux (lm)	204	Power Factor	1	Operator	
				Date	2021-08-05 오후 1:24:22

Luminous Flux Table

Total Lamp Lumens:	204
Luminaire Efficiency (lm/W):	204.41
CIE Classification:	Direct

Elevation	Lumens	Cumulative	Lamp %	Luminaire %
0	4.38	4.38	2.14	2.14
5	32.04	36.41	17.82	17.81
10	48.52	84.94	41.55	41.55
15	46.41	131.35	64.26	64.26
20	32.90	164.26	80.36	80.36
25	19.00	183.25	89.65	89.65
30	10.37	193.62	94.73	94.72
35	5.29	198.91	97.32	97.31
40	2.48	201.39	98.53	98.52
45	1.15	202.54	99.09	99.09
50	0.55	203.09	99.36	99.36
55	0.32	203.42	99.52	99.52
60	0.21	203.62	99.62	99.62
65	0.15	203.77	99.69	99.69
70	0.09	203.86	99.74	99.73
75	0.03	203.89	99.75	99.75
80	0.01	203.90	99.75	99.75
85	0.01	203.91	99.76	99.76
90	0.04	203.95	99.78	99.78
95	-0.01	203.94	99.77	99.77
100	0.02	203.96	99.78	99.78
105	0.04	204.00	99.80	99.80
110	0.03	204.03	99.82	99.82
115	0.03	204.06	99.83	99.83
120	0.08	204.14	99.87	99.87
125	0.15	204.30	99.95	99.95
130	0.11	204.41	100.00	100.00

Luminaire

Lamp

No. of lamps 1

Voltage (V) 24

Report

Filename 210805 DVP-24V-C90-R 2684K.jdt

Lamp flux (lm) 204

Current (A) 0.108



Operator

Total flux (lm) 204

Power Factor 1

Date 2021-08-05 오후 1:24:22

IsoCandela (Type C)

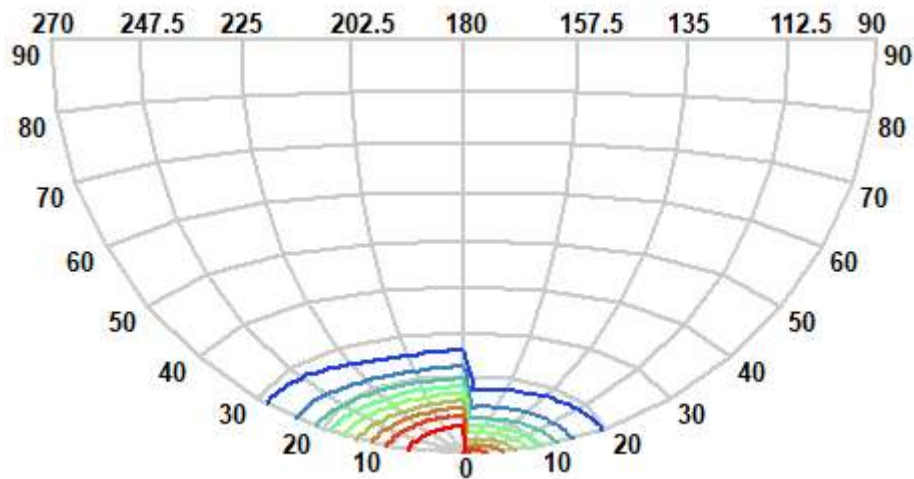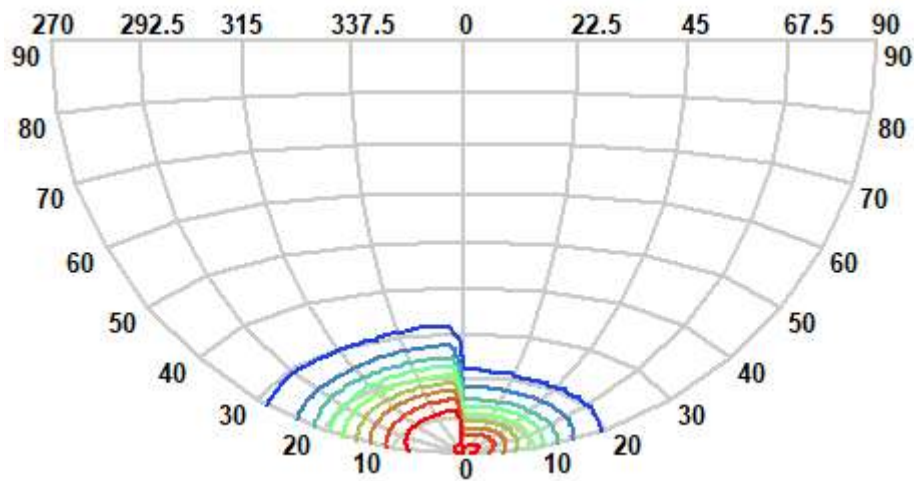

Luminaire

Lamp

No. of lamps 1

Voltage (V) 24

Report

Filename 210805 DVP-24V-C90-R 2684K.jdt

Lamp flux (lm) 204

Current (A) 0.108


Operator

Total flux (lm) 204

Power Factor 1

Date 2021-08-05 오후 1:24:22

IsoLux Diagram (Ground)

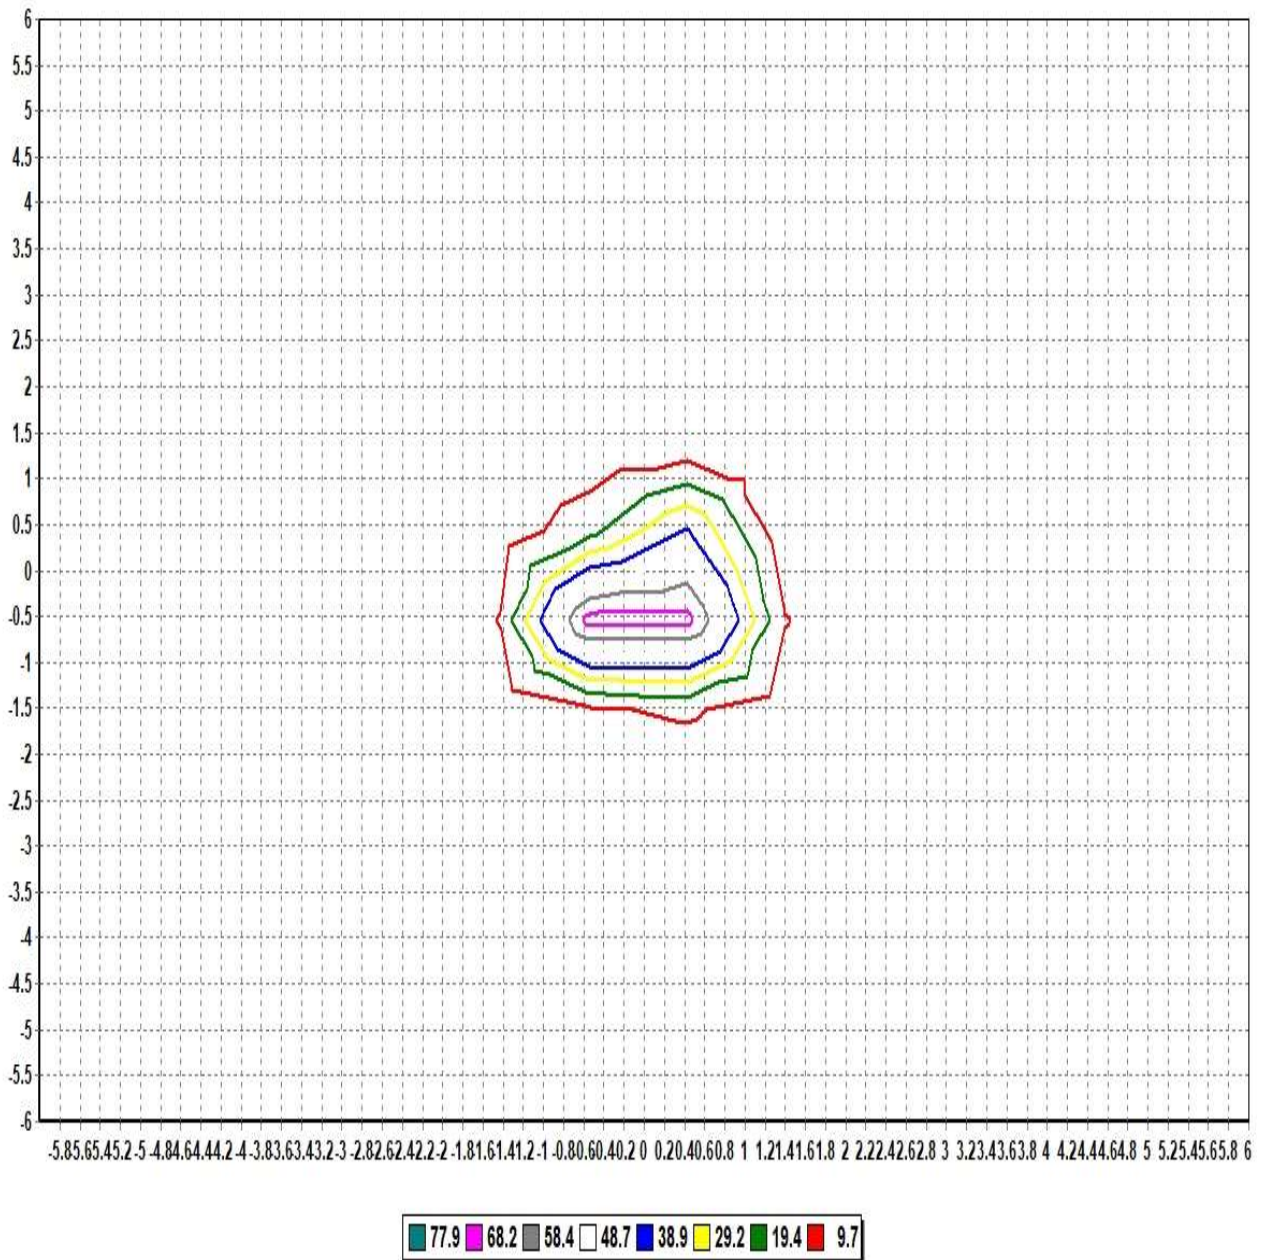

Pole Height (m): 2.7

Area Width (m): 12

Total Optical Solution Provider

Luminaire

Lamp

No. of lamps 1

Voltage (V) 24

Report

Filename 210805 DVP-24V-C90-R 2684K.jdt

Lamp flux (lm) 204

Current (A) 0.108

Operator


Total flux (lm) 204

Power Factor 1

Date

2021-08-05 오후 1:24:22

IsoLux Diagram (Wall)

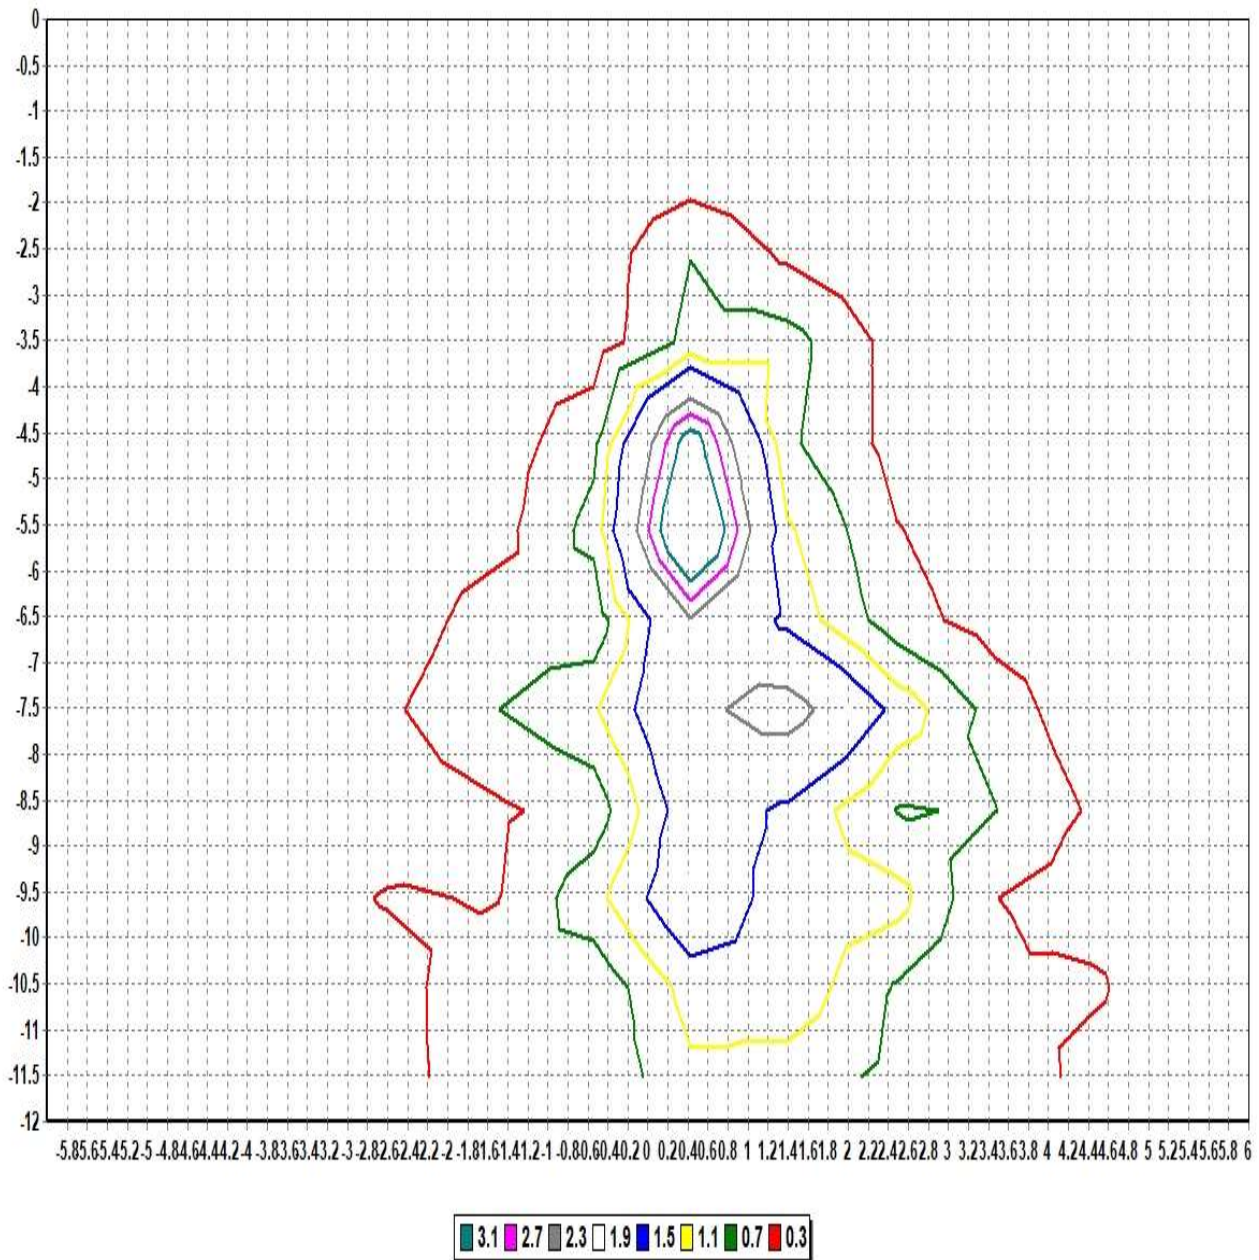

Pole Height (m): 2.7

Wall Distance (m): 2.7

Aiming Plane: 0

Wall Height (m): 12

Total Optical Solution Provider



Luminaire

Lamp

No. of lamps	1	Voltage (V)	24
Lamp flux (lm)	204	Current (A)	0.108
Total flux (lm)	204	Power Factor	1

Report

Filename 210805 DVP-24V-C90-R 2684K.jdt

Operator

Date 2021-08-05 오후 1:24:22

Illuminance Levels (Ground)



6.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00
5.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4.00	0.00	0.00	0.00	0.01	0.00	0.02	0.02	0.01	0.01	0.00	0.01	0.00	0.00
3.00	0.00	0.00	0.01	0.00	0.02	0.02	0.04	0.04	0.00	0.02	0.01	0.01	0.00
2.00	0.00	0.00	0.01	0.03	0.09	0.14	1.02	0.21	0.13	0.02	0.01	0.01	0.01
1.00	0.00	0.00	0.01	0.03	0.10	1.67	17.95	2.60	0.26	0.03	0.02	0.00	0.00
0.00	0.01	0.01	0.02	0.07	2.40	45.87	104.83	23.67	1.15	0.05	0.03	0.01	0.01
-1.00	0.00	0.01	0.02	0.07	0.53	6.23	52.10	11.44	1.18	0.13	0.05	0.02	0.00
-2.00	0.01	0.00	0.01	0.02	0.31	0.60	3.34	0.78	0.56	0.05	0.01	0.01	0.00
-3.00	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.07	0.05	0.02	0.01	0.01	0.00
-4.00	0.00	0.00	0.01	0.01	0.01	0.03	0.04	0.03	0.00	0.02	0.00	0.00	0.00
-5.00	0.00	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00
-6.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00	

Illum. (Max.) : 105

Illum. (Min.) : 0.00

Illum. (Avg.) : 1.66

All illuminance level values are in lux.



Luminaire

Lamp

No. of lamps 1

Voltage (V) 24

Report

Filename 210805 DVP-24V-C90-R 2684K.jdt

Lamp flux (lm) 204

Current (A) 0.108


Operator

Total flux (lm) 204

Power Factor 1

Date 2021-08-05 오후 1:24:22

Illuminance Cone Diagram

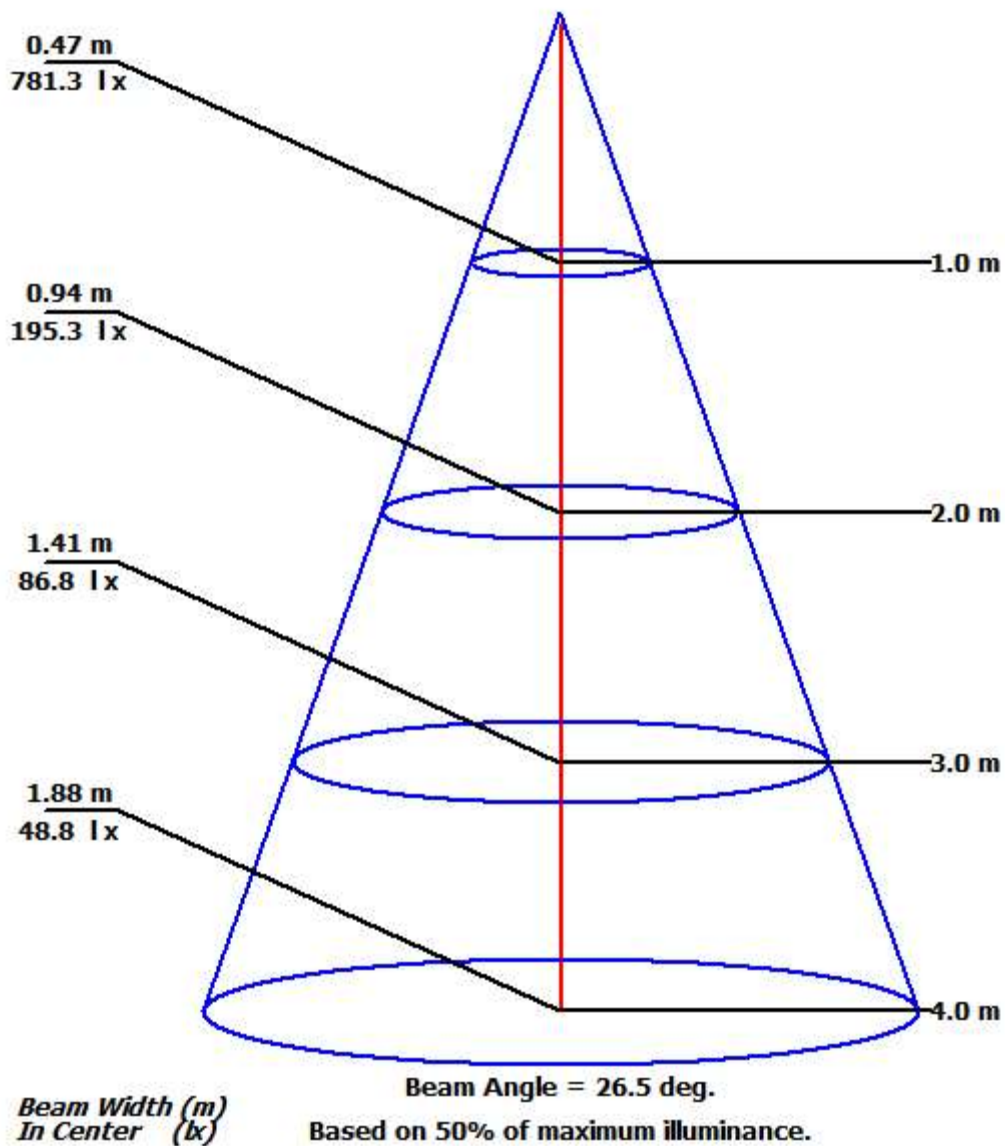



Luminaire

Lamp

No. of lamps	1	Voltage (V)	24
Lamp flux (lm)	204	Current (A)	0.108
Total flux (lm)	204	Power Factor	1

Report

Filename 210805 DVP-24V-C90-R 2684K.jdt

Operator

Date 2021-08-05 오후 1:24:22

Coefficient of Utilization

	Refl.	Ceiling (%)	80%	80%	80%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
	Refl.	Wall (%)	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
Eff. Floor Cavity	Refl.		20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
Room CR	0		0.89	0.89	0.89	0.87	0.87	0.87	0.83	0.83	0.83	0.80	0.80	0.80	0.76	0.76	0.76	0.75
Room CR	1		0.84	0.83	0.82	0.83	0.82	0.80	0.80	0.79	0.78	0.77	0.76	0.76	0.75	0.74	0.73	0.72
Room CR	2		0.80	0.78	0.76	0.79	0.77	0.76	0.77	0.75	0.74	0.75	0.73	0.72	0.73	0.72	0.71	0.70
Room CR	3		0.77	0.74	0.72	0.76	0.74	0.72	0.74	0.72	0.71	0.73	0.71	0.70	0.71	0.70	0.69	0.68
Room CR	4		0.74	0.71	0.69	0.73	0.71	0.69	0.72	0.70	0.68	0.71	0.69	0.67	0.69	0.68	0.66	0.65
Room CR	5		0.72	0.68	0.66	0.71	0.68	0.66	0.70	0.67	0.65	0.69	0.67	0.65	0.68	0.66	0.64	0.64
Room CR	6		0.69	0.66	0.64	0.69	0.66	0.64	0.68	0.65	0.63	0.67	0.65	0.63	0.66	0.64	0.63	0.62
Room CR	7		0.67	0.64	0.62	0.67	0.64	0.62	0.66	0.63	0.61	0.65	0.63	0.61	0.64	0.62	0.61	0.60
Room CR	8		0.65	0.62	0.60	0.65	0.62	0.60	0.64	0.61	0.60	0.63	0.61	0.59	0.63	0.61	0.59	0.59
Room CR	9		0.63	0.60	0.58	0.63	0.60	0.58	0.62	0.60	0.58	0.62	0.60	0.58	0.61	0.59	0.58	0.57
Room CR	10		0.62	0.59	0.57	0.61	0.59	0.57	0.61	0.58	0.57	0.60	0.58	0.56	0.60	0.58	0.56	0.56

