
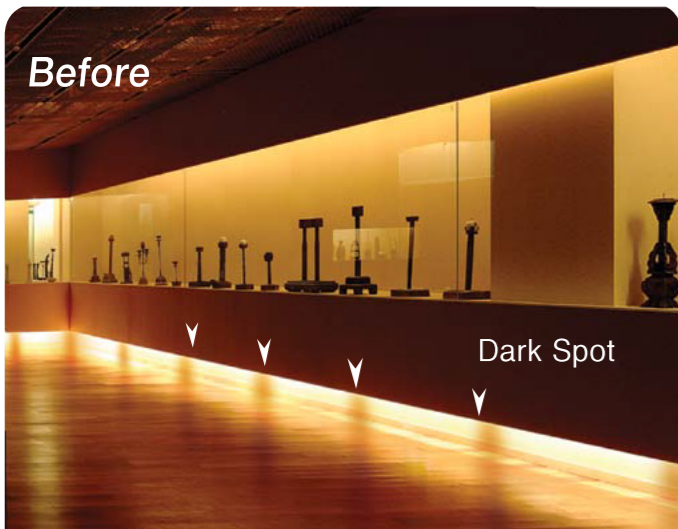
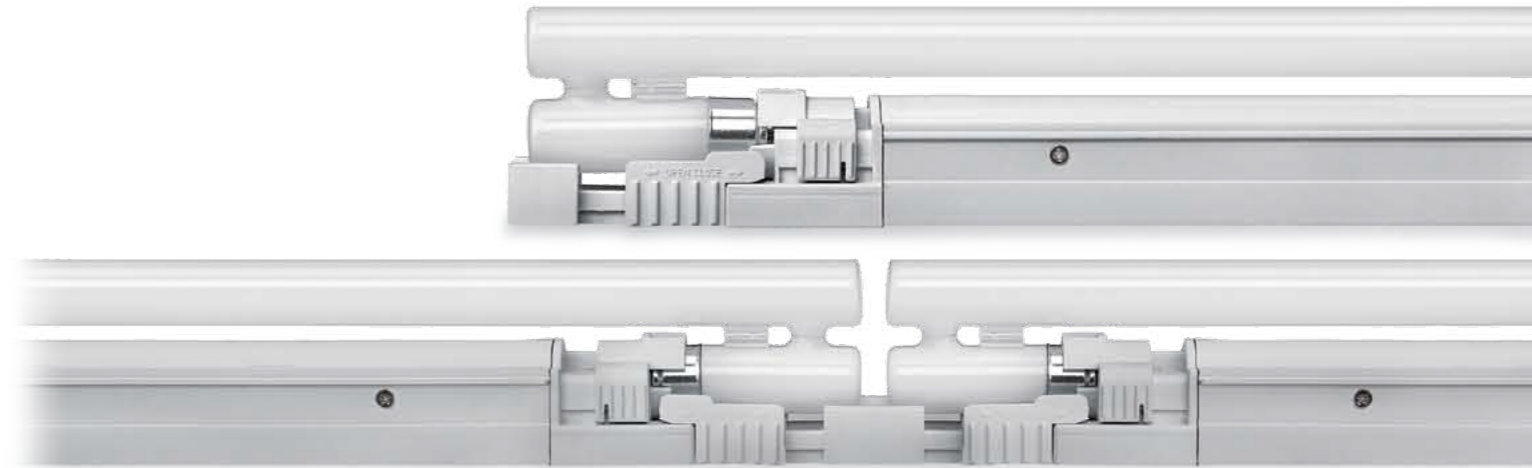


# SlimLamp Seamless

T5 Seamless Illumination

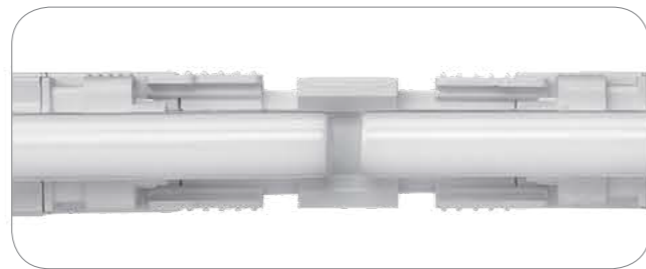

## SlimLamp Seamless

Bring the drama of Seamless Illumination to Coves and Curves with the Feelux T5 SlimLamp Seamless. Daisy-chain this Award-Winning Product and socket shadowing will never be a problem! You'll save money, installation time and energy costs when the SlimLine is compared to basic T8 and T5 staggered fluorescent fixtures.

## Product Features

- High efficiency built-in program start ballast
- End of Lamp life (EOL) protection
- Low profile rigid extruded aluminum body
- Quick connect system
- Daisy chain up to 600W together
- Available in standard and high output

## Benefits

- T5 based seamless line of light
- Energy savings over staggered strips
- Installation savings through quick connection
- Operates in very tight areas

## Specification

- Frequency range : 60Hz
- Voltage : 110~130V/277V \*(only available in HE)
- Power factor : >97%
- Color rendering : Ra>80
- THD : <15%
- Class of protection I
- Degree of protection IP20
- Tube life : 20,000hr

## Notice

- Max. connection : 600W
- 14W(42pcs), 21W(28pcs), 28W(21pcs), 24W(25pcs), 39W(15pcs), 54W(11pcs)

## Accessories

- Ⓐ Connecting cables
 

SLLPTC/XL	SLLPTC 1/XL	SLLPTC 2/XL	SLLPTC 4/XL	SLLPTC 6/XL
6inch(150mm)	1feet(300mm)	2feet(600mm)	4feet(1200mm)	6feet(1800mm)
- Ⓑ Direct connector : SLLCPL/XL
- Ⓒ Connecting cables between fixture Hard wire box
 

ESLSLLPTC/XL	ESLSLLPTC1/XL	ESLSLLPTC2/XL	ESLSLLPTC4/XL	ESLSLLPTC6/XL
6inch(150mm)	1feet(300mm)	2feet(600mm)	4feet(1200mm)	6feet(1800mm)
- Ⓓ Metal Hard wire box w/knockouts : MHWB-DSL
- Ⓔ Power cord : SLLPC120/XL
- Ⓕ End Cap : SLL- OUTLET CAP
- Ⓖ Seamless T5 lamps
 

2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6500K, 8000K, Red, Green and Blue are available.
--
- Ⓗ Metal Bracket : MSL BRACKET
- Ⓘ Diffuser

SLL14CV	SLL21CV	SLL28CV
14, 24W	21, 39W	28, 54W

Model Name	Lamp Power (W)	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)
NSLL8-120V	8	13 7/8	10 4/8	1 6/8	1 1/16	1 5/8
NSLL14-120V	14	22 7/8	19 6/8	1 6/8	1 1/16	1 5/8
NSLL21-120V	21	34 11/16	31 5/8	1 6/8	1 1/16	1 5/8
NSLL28-120V	28	46 4/8	43 3/8	1 6/8	1 1/16	1 5/8
NSLL24-120V	24	22 7/8	19 6/8	1 6/8	1 1/16	1 5/8
NSLL39-120V	39	34 11/16	31 5/8	1 6/8	1 1/16	1 5/8
NSLL54-120V	54	46 4/8	43 3/8	1 6/8	1 1/16	1 5/8
NSLL14-277V	14	22 7/8	19 6/8	1 6/8	1 1/16	1 5/8
NSLL21-277V	21	34 11/16	31 5/8	1 6/8	1 1/16	1 5/8
NSLL28-277V	28	46 4/8	43 3/8	1 6/8	1 1/16	1 5/8

