
FFFLUX

NDP-OSM Occupancy Sensor Inline Module

Specifications		
Input Voltage	DC 24V With Constant Voltage LED Convertor (Only CV Mode)	
Output Voltage	DC 24V PWM Output (1kHz)	
Output Power	Max. 55W	
Dimming Range	1-100%	
Dimming Curve	Linear	
Sensing Technology	PIR	
Timeout	30 seconds	
Operating Temperature	0°C ~ 50°C	
Coverage	5M, 16.4ft (Ceiling height 5M) * Coverage of PIR sensor may varies by ceiling height	
Detection Angle	94°	

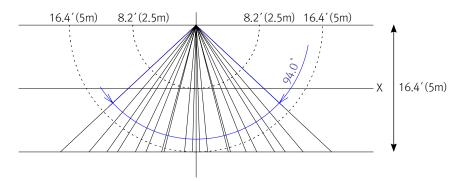

Product Dimensions, weight		
Dimensions	W72.4 X L13.2 H13.2 (mm)	$\overbrace{\hspace{1.5cm}}^{\hspace{1.5cm}} \hspace{1.5cm} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \hspace{1.5cm}} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \hspace{1.5cm} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \hspace{1.5cm}} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \hspace{1.5cm} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \hspace{1.5cm}} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} } \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \hspace{1.5cm}} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \overset{\hspace{1.5cm}}}{\hspace{1.5cm}} \hspace{1.5cm}} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \overset{\hspace{1.5cm}}}{\hspace{1.5cm}} \hspace{1.5cm}} \overset{\hspace{1.5cm}}{\hspace{1.5cm}} \overset{\hspace{1.5cm}}}{\hspace{1.5cm}} \hspace{1.5cm}} \overset{\hspace{1.5cm}}}{\hspace{1.5cm}} \overset{\hspace{1}}}} \overset{\hspace{1}}{\hspace{1.5cm}} \overset{\hspace{1}}}}} \overset{\hspace{1}}{\hspace{1.5cm}} \overset{\hspace{1}}}{\hspace{1.5cm}} \overset{\hspace{1}}}} \overset{\hspace{1}}{\hspace{1.5cm}} \overset{\hspace{1}}}}} \overset{\hspace{1}}}{\hspace{1.5cm}} \overset{\hspace{1}}}} \overset{\hspace{1}}}{\hspace{1.5cm}} \overset{\hspace{1}}}}} \overset{\hspace{1}}}{\hspace{1.5cm}} \overset{\hspace{1}}}} \overset{\hspace{1}}}}{\hspace{1}\phantomm}} \overset{\hspace{1}}}} \overset{\hspace{1}}}}{\hspace{1}\phantomm}} \overset{\hspace{1}}}}} \overset{\hspace{1}}}}{\hspace{1}\phantomm}} \overset{\hspace{1}}}}} \overset{\hspace{1}}}}{\hspace{1}\phantomm}} \overset{\hspace{1}}}}} \overset{\hspace{1}}}}}{\hspace{1}\phantomm}} \overset{\hspace{1}}}}} \overset{\hspace{1}}}}}} \overset{\hspace{1}}}}}\\{\end{array}} \end{array}} \overset{\hspace{1}}}}}} \overset{\hspace{1}}}}}}{\phantomm}} \overset{\hspace{1}}}}}} \overset{\hspace{1}}}}}}}{\phantomm}} \overset{\hspace{1}}}}}}{\end{array}} \overset{\hspace{1}}}}}} \overset{\hspace{1}}}}}}}}{\phantomm}} \overset{\hspace{1}}}}}} \end{array}}} \overset{\hspace{1}}}}}}}\\{\end{array}} \end{array}} \overset{\hspace{1}}}}}}}}\\{\end{array}} \end{array}} \overset{\hspace{1}}}}}}}} \end{array}} \end{array}}}$
	W2.85 X L0.52 H0.52 (in)	
Weight	10g	

FEELUX Lighting, Inc., 3000 Northwoods Parkway, Suite 165, Peachtree Corners, GA 30071 | Tel: 678.668.7005 | feeluxlighting.com | info@feeluxlighting.com | customerservice@feeluxlighting.com If you have any questions, please contact your local Feelux Representative. Specifications subject to change without notice. All Rights Reserved. © 2018 Feelux Lighting, Inc.

