



#### Product Features

- Linkable together and with Feelux FLX Stix NDV Linear LED
- Single 4W diode eliminates multiple shadows
- Virtually no heat emission and no UV radiation
- Available in silver, gold, white, black
- Friction fit in slim pocket with mounting spring option
- To be used with constant voltage DC 24V driver
- Dimmable with available accessories

#### **Specification**

- Voltage: DC 24V

– Operating temperature : 32~113F (0~45 $^{\circ}$  C)

- Lamp life : 40,000hr/70%

- Available color: 3000K, 4000K, 6000K

Color rendering : Ra>85Energy efficiency : 80 lm/WDegree of protection IP20

- Total energy consumption of 4.3W











Various color





## Single diode without multiple shadows






#### Dimension



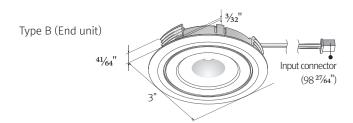

#### Surface mount ring




#### Max. connection of linked fixtures

– LED Driver


Model Name	Max. units for LED driver		
	24V / 15W	24V / 30W	24V / 75W
DVS4A-[Color]K-24V-WT	3	7	17

#### Installation

Linkable between Diva2 Spot & Diva2 Spot (Type A)




Linkable between Diva2 Spot & Diva2 (Type A)




Linkable between Diva2 & Diva2 Spot (Type A)



Hole Diameter



Mounting Spring Installation



#### Accessories



@ FLX Spot DVS		
White	Black	
DVS4A-[Color]K-24V-WT	DVS4A-[Color]K-24V-BK	
Silver DVS4A-[Color]K-24V-SV	Gold DVS4A-[Color]K-24V-GD	



b Extension cable (Between Diva2 Spot & Diva2 Spot or 6 way distributor) DVS-Cable (A) : 98  $^{27}\!\!/\!\!64''$ 



# $\circledcirc$ Connecting cable (Between FLX Spot DVS & FLX Stix NDV)

DVS-Cable (B): 39 %"



#### @ Connecting cable(Between FLX Stix NDV & FLX Spot DVS)

NDVPC: 98 <sup>27</sup>/<sub>64</sub>"



#### ⊕ Dimming Interface (1–10V): FDC–L10 (Max.100W)



### ① Mounting spring: DVS-Spring



#### 

Part No	FLC15-24V/XL	FLC30-24V/XL	FLC75-24V/XL
Capacity	15W 24V	30W 24V	75W 24V



# White Black Gold Silver DVS-SR-WT DVS-SR-BK DVS-SR-GD DVS-SR-SV



① Deco ring					
	White	Black	Gold	Silver	
	DVS-DR-WT	DVS-DR-BK	DVS-DR-GD	DVS-DR-SV	