

SlimLamp

T5 Linear Illumination



SlimLamp

After decades of top quality and performance known only through private labels, the SlimLamp standard T5 can now be purchased directly from Feelux. The SlimLamp is highly efficient with a built-in electronic ballast and low heat output. It's modular connecting systems and interchangeable lengths allows the SlimLamp to create a long and continuous flow of fluorescent light for any tight space.

Easy connection



Product Features

- High efficiency built-in rapid start ballast
- End of Lamp life (EOL) protection
- Low profile rigid extruded aluminum body
- Quick connection system
- Daisy chain up to 600W together

Benefits

- Low heat output makes it ideal for use in display
- Fits almost anywhere
- Installation savings through quick connection system
- Operates in very tight areas


Application

- Space for Modern design by using T5 size (16mm)
- Office, Hotel, Living room, Cabinet, Showcase, Furniture

Specification

- Frequency range : 60Hz
- Voltage : 110~130V
- Power factor : >97%
- Color rendering : Ra>80
- Tube life: 20,000hr
- Tube diameter: 16mm(T5)
- Class of protection II
- Degree of protection IP20
- Supply Voltage : 120V
- Line frequency : 60Hz
- Automatic safety shutdown of lamps in the event of a defect or at end of life (EOL)
- Automatic restart after lamp replacement
- Approval marks : cULus mark
- Safety acc. to UL 153 and C22.2 NO.12

Installation

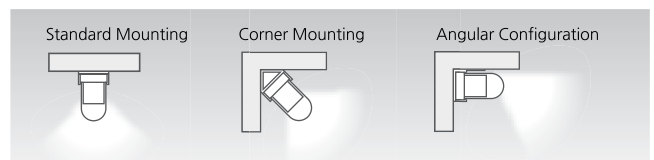



Notice

Maximum interconnected wattage (units) : 600W
 8W(44pcs), 14W(41pcs), 21W(28pcs), 28W(21pcs), 35W(17pcs)

Accessories

Ⓐ Connecting cables

DLPTC/XL	DLPTC1/XL	DLPTC2/XL	DLPTC4/XL	DLPTC6/XL
6inch(150mm)	1feet(300mm)	2feet(600mm)	4feet(1200mm)	6feet(1800mm)

Ⓑ Direct connector : DLCPL/XL

Power cord

Ⓒ DLPC120/XL	Ⓓ DLPC120/SM2/XL
6feet (1800mm)	6feet (1800mm) with straight connctor

Ⓔ Fluorescent lamps

2200K, 2700K, 3000K, 3500K, 4000K, 6500K, 8000K,
 Red, Green and Blue are available.


Ⓕ On/Off switch : DLSB/XL

Ⓖ Matal Bracket : MSL BRACKET

Ⓗ Diffuser

SL8CV	SL14CV	SL21CV	SL28CV	SL35CV
8W	14W	21W	28W	35W

Ⓙ Hard wire box : MHWB-DL

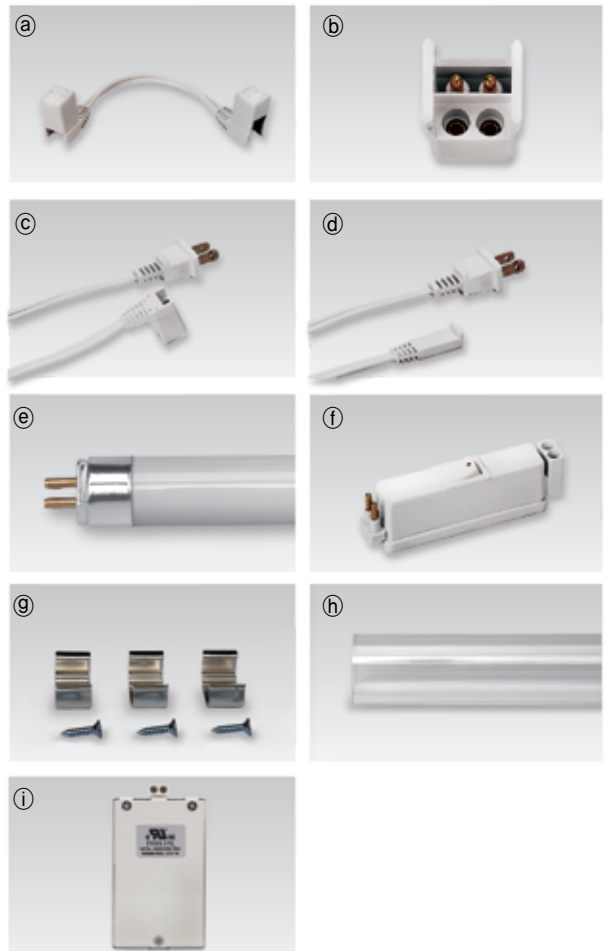

Model Name	LampPower (W)	L (inch)	W (inch)	H (inch)	H (inch) with diffuser
NSL8-120V	8	13 3/16	29/32	1 11/32	1 1/2
NSL14-120V	14	23 7//16	29/32	1 11/32	1 1/2
NSL21-120V	21	35 4/16	29/32	1 11/32	1 1/2
NSL28-120V	28	47 1/16	29/32	1 11/32	1 1/2
NSL35-120V	35	58 14/16	29/32	1 11/32	1 1/2

