


Seamless T5 Replacement Fluorescent Tube

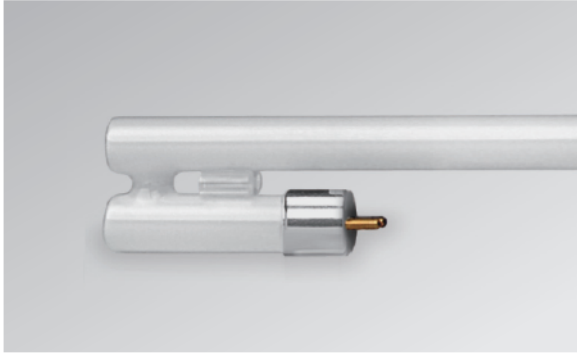

Diameter: 0.63" / 16mm
 Base: 2 Pin
 Length: 2' / 3' / 4' / 5'
 CRI: > 80
 Rated Life: 20,000 hours
 Lamp Type:T5

Type _____
 Project _____
 Qty _____
 Notes _____

Model No.	High Efficiency (HE) High Output (HO)	Wattage	Light Output (up to 4000K)	Light Output (6000K)	Length (nominal)
FBL	HE	14 watt	1200 Lumens	1100 Lumens	2' (nom.) / 582mm
FBL	HE	21 watt	1900 Lumens	1750 Lumens	3' (nom.) / 882mm
FBL	HE	28 watt	2600 Lumens	2400 Lumens	4' (nom.) / 1182mm
FBL	HE	35 watt	3300 Lumens	3050 Lumens	5' (nom.) / 1402mm
FBL	HO	24 watt	1750 Lumens	1600 Lumens	2' (nom.) / 582mm
FBL	HO	39 watt	3100 Lumens	2850 Lumens	3' (nom.) / 882mm
FBL	HO	54 watt	4450 Lumens	4100 Lumens	4' (nom.) / 1182mm

* 100% Max to 94% Min.

Specifications

Seamless T5 linear fluorescent lamp tube/compact fluorescent lamp

Description

High Efficiency: 14W 21W 28W 35W

High Output: 24W 39W 54W

Color Temperature Options

2200K-8000K

Certifications



Class of Protection: II

Degree of Protection: IP20

Recommended Applications

T5 fluorescent light bulbs tube are a small linear type of fluorescent that are used in many applications including Office, Hotel, Living Room, Cabinet, Showcase and Furniture

MODEL NO.
 FBL = Feelux Bent Lamp

WATTAGE
 14W = High Efficiency 14 watts
 21W = High Efficiency 21 watts
 28W = High Efficiency 28 watts
 35W = High Efficiency 35 watts
 24W = High Output 24 watts
 39W = High Output 39 watts
 54W = High Output 54 watts

COLOR / K
 22K = 2200
 24K = 2400
 27K = 2700
 30K = 3000
 35K = 3500
 40K = 4000
 65K = 6500
 80K = 8000

Mercury Level: Max 3 mg (Nominal 2.5 mg)



Feelux Lighting, Inc. Tel: 678-668-7005 Fax: 678-668-7006 E-mail: info@feelux.com
 www.feelux.com